



PA-SERIES


PA-D44 (COMPRESSION DRIVER)

GENERAL SPECIFICATIONS

Throat Diameter	25	mm	(1 in)
Mounting Type	Bolt-On		
Nominal Impedance	8	ohm	
D.C Resistance	6.4	ohm	
Power Capacity	30	W	1 KHz
	50	W	2 KHz
Sensitivity (1w/1m)	105	dB With PH-2370 Horn	
Usable Frequency Range	1.5K~20K	Hz	
Recommended Crossover	1K Hz Or Higher,	12 dB/oct. minimum	
Voice Coil Diameter	44.4	mm	(1.75 in)
Magnetic Assembly Weight	3	Kg	(6.6 lb)
Flux Density	1.8	T	
Magnet	Strontium Ferrite		
Diaphragm	Titanium		
Voice Coil Material	Edge Wound		
	Aluminium wire		
Voice Coil Former	Resin Bonded Nomex		

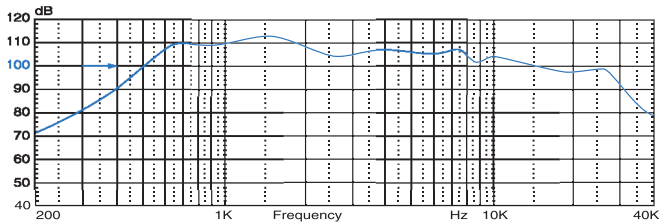

TOP VIEW





SIDE VIEW


PA-D34 (COMPRESSION DRIVER)

GENERAL SPECIFICATIONS

Throat Diameter	25	mm	(1 in)
Mounting Type	Bolt-On		
Nominal Impedance	8	ohm	
D.C Resistance	6.4	ohm	
Power Capacity	20	W	1 KHz
	30	W	2 KHz
Sensitivity (1w/1m)	105	dB With PH-3616 Horn	
Usable Frequency Range	1.2K~20K	Hz	
Recommended Crossover	1K Hz Or Higher,	12 dB/oct. minimum	
Voice Coil Diameter	34.4	mm	(1.35 in)
Magnetic Assembly Weight	1.25	Kg	(2.75 lb)
Flux Density	1.6	T	
Magnet	Strontium Ferrite		
Diaphragm	Alloy Aluminium		
Voice Coil Material	Edge Wound		
	Aluminium wire		
Voice Coil Former	Resin Bonded Glass Fiber		

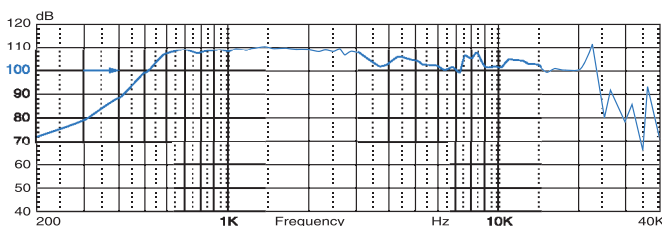

TOP VIEW



SIDE VIEW