



PA-SERIES


PA-DE34 (COMPRESSION DRIVER)

GENERAL SPECIFICATIONS

Throat Diameter	25	mm	(1 in)
Mounting Type	Bolt-On		
Nominal Impedance	8	ohm	
D.C Resistance	6.4	ohm	
Power Capacity	20	W	1 KHz
	30	W	2 KHz
Sensitivity (1w/1m)	105	dB With PH-3616 Horn	
Usable Frequency Range	800-20K Hz		
Recommended Crossover	1K Hz Or Higher, 12 dB/oct. minimum		
Voice Coil Diameter	34.4	mm	(1.35 in)
Magnetic Assembly Weight	1	Kg	(2.2 lb)
Flux Density	1.6	T	
Magnet	Strontium Ferrite		
Diaphragm	Titanium		
Voice Coil Material	Edge Wound wire		
	Aluminium wire		
Voice Coil Former	Fesin Bonded Glass Fiber		

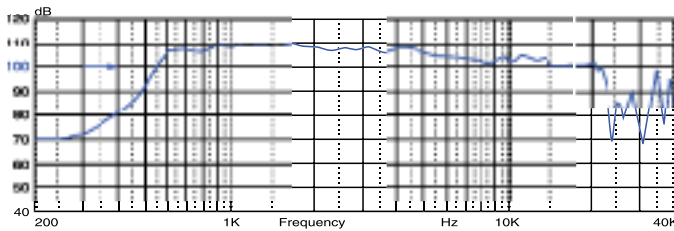

TOP VIEW


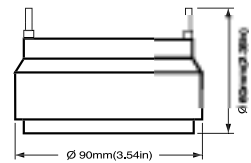


SIDE VIEW

PA-DE34S (COMPRESSION DRIVER)

GENERAL SPECIFICATIONS

Throat Diameter	25	mm	(1 in)
Mounting Type	Screw-On		
Nominal Impedance	8	ohm	
D.C Resistance	6.4	ohm	
Power Capacity	20	W	1.5K Hz
	30	W	1.5K Hz
Sensitivity (1w/1m)	105	dB With ph-240 Horn	
Usable Frequency Range	800-20k Hz		
Recommended Crossover	1k Hz Or higher		
Voice Coil Diameter	34.4	mm	(1.35 in)
Magnetic Assembly Weight	1.5	Kg	(3.3 lb)
Flux Density	1.6	T	
Magnet	Strontium Ferrite		
Diaphragm	Aluminium		
Voice Coil Material	Edge Wound		
	Aluminium wire		
Voice Coil Former	Fesin Bonded Kapton		

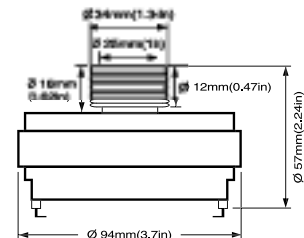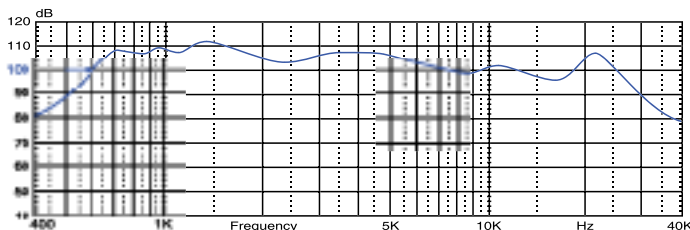

SIDE VIEW