



## PHT-405

### HIGH FREQUENCY SUPER TWEETER

#### GENERAL SPECIFICATIONS

Usable Frequency Range	: 2K~15K	Hz
Power Rating	: 20	W
Average Sensitivity (1w/1m)	: 105	dB
Impedance	: 8	ohm
Voice coil Diameter	: 25.4	mm
Voice coil Materia	: Round Copper Wire	
Horn Material	: A.B.S With Glass Filled Black Polycarbonate	

Diaphragm	: Phenolic Resin	
Cut off Frequency	: 780	Hz
Mouth Width	: 115	mm (4.5 in)
Mouth Height	: 115	mm (4.5 in)
Mouth Depth	: 115	mm (4.5 in)
Mounting Flange Thickness	: 5	mm (0.19 in)
Mounting Holes	: 4x5	mm (0.2 in)

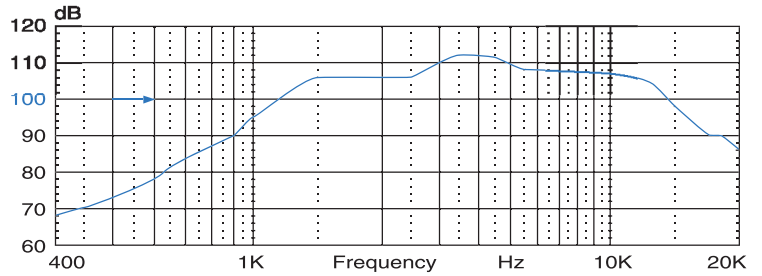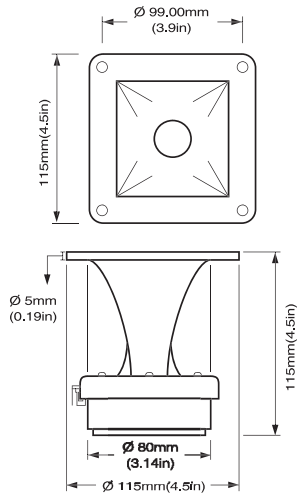

## PHT-406

### HIGH FREQUENCY SUPER TWEETER

#### GENERAL SPECIFICATIONS

Usable Frequency Range	: 2K~15K	Hz
Power Rating	: 20	W
Average Sensitivity (1w/1m)	: 105	dB
Impedance	: 8	ohm
Voice coil Diameter	: 25.4	mm
Voice coil Materia	: Round Copper Wire	
Horn Material	: A.B.S. With Glass Filled Black Polycarbonate	

Diaphragm	: Phenolic Resin	
Cut off Frequency	: 780	Hz
Mouth Width	: 120	mm (4.72 in)
Mouth Height	: 120	mm (4.72 in)
Mounting Flange Thickness	: 8	mm (0.31 in)
Mounting Holes	: 4x5	mm (0.2 in)

