


# SN-SERIES HIGH FREQUENCY COMPRESSION DRIVER

## SN-D44S

### GENERAL

- Throat Diameter : 25 mm
- Nominal Impedance : 8 Ω
- Operating Bandwidth: : 1.5k Hz - 20k Hz
- Power Handling (IEC) : 60 W(rms)
- Sensitivity @ 2.83V, 1m : 106 dB
- Mounting Type : **Screw on**
- Terminals : Gold Plated Push
- Net Weight : 1.27 Kg (2.794Lb)/pcs
- Gross Weight : 1.34 Kg (2.948Lb)/pcs
- Packing Dimension WxLxH(mm): 100 X 100 X 65  
3.9inx 3.93inx2.5in

### MOUNTING INFORMATION

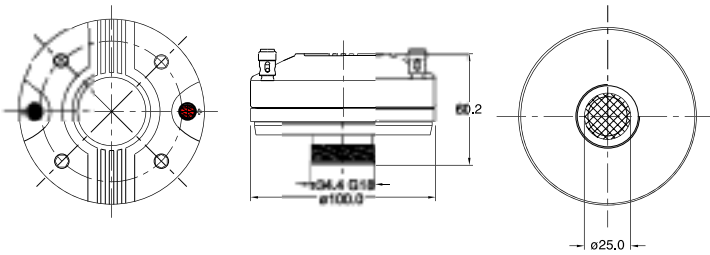

## SN-D34S


### GENERAL

- Throat Diameter : 25 mm
- Nominal Impedance : 8 Ω
- Operating Bandwidth: : 2k Hz - 20k Hz
- Power Handling (IEC) : 40 W(rms)
- Sensitivity @ 2.83V, 1m : 104 dB
- Mounting Type : **Screw on**
- Terminals : Gold Plated Push
- Net Weight : 0.741Kg (1.62Lb)/pcs
- Gross Weight : 0.771Kg (1.65Lb)/pcs
- Packing Dimension WxLxH(mm): 100 X 100 X 60  
3.9inX3.9inX2.3in

### MATERIALS

- Diaphragm : Titanium
- Voice Coil Bobbin : Kapton 400°C
- Voice Coil Size : 34.4 mm (1.35in) Flat Aluminum wire 300°C
- Magnet : Neodymium

### MOUNTING INFORMATION

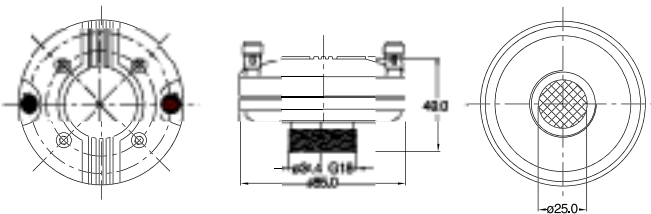

### MATERIALS

- Diaphragm : Titanium
- Voice Coil Bobbin : Kapton 400°C
- Voice Coil Size : 44.4 mm (1.75in) Flat Aluminum wire 300°C
- Magnet : Neodymium

