
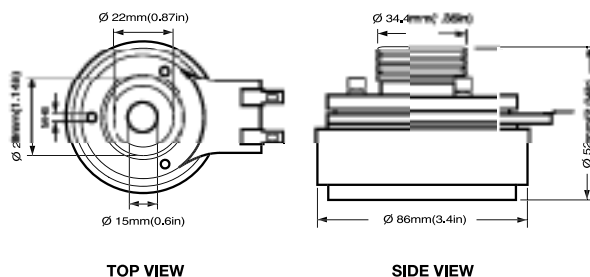


PA-SERIES

PA-D25 (HORN TWEETER)

GENERAL SPECIFICATIONS

Throat Diameter	25	mm	(1 in)
Mounting Type	Screw-On		
Nominal Impedance	8	ohm	
D.C Resistance	6.5	ohm	
Power Capacity	30	W	
Sensitivity (1w/1m)	105	dB	
Usable Frequency Range	: 1.5K~15K Hz		
Voice Coil Diameter	25	mm	(1 in)
Magnetic Assembly Weight	: 0.75	Kg	(1.65 lb)
Flux Density	1.9	T	
Magnet	Strontium Ferrite		
Diaphragm	Titanium		
Voice Coil Material	Round Copper Wire		
Voice Coil Former	Resin Bonded Kapton		

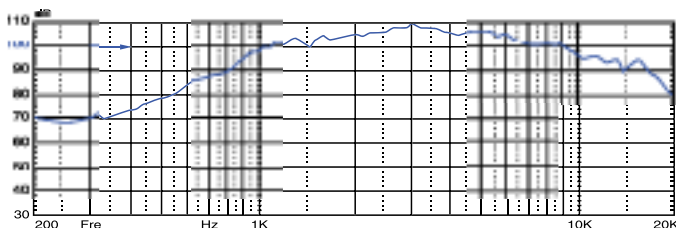

PA-D26S (HORN TWEETER)

GENERAL SPECIFICATIONS

Throat Diameter	22	mm	(0.87 in)
Mounting Type	Screw-On		
Nominal Impedance	8	ohm	
D.C Resistance	7.6	ohm	
Power Capacity	30	W	
Sensitivity (1w/1m)	105	dB	
Usable Frequency Range	: 2K~15K Hz		
Voice Coil Diameter	25.4	mm	(1 in)
Magnetic Assembly Weight	: 0.67	Kg	(1.47 lb)
Flux Density	1.2	T	
Magnet	Strontium Ferrite		
Diaphragm	Phenolic Resin		
Voice Coil Material	Round Copper Clad Aluminium Wire		
Voice Coil Former	Resin Bonded Paper		

